



Cable Carrier Chain Selection Form

Kindly fill out the information below to help us select the best Cable Carrier Chain for your application. PLEASE NOTE: we offer free site visits if you require assistance with taking the measurements.

Name of Company: Contact Email: Contact Phone:	
Ba LS MAX.	
(Ba) Outer Width of the Chain in mm: I.e 55mm Your measurement Ba: (H) Outer Height of the Chain in mm: I.e 45mm Your measurement H: (LS) Travel Length/Stroke Length of the Chain in mm or M: I.e 1900mm or 1.9M Your measurement LS: (RH) Outer Height of the chains Bending Radius in mm: I.e 223mm Your measurement RH: Or (R) The Bending Radius of the chain which is mentioned as the last number on the model number that is engraved on to the physical chain in mm: I.e 328.200mm Your measurement R:	
According to the application's specific needs, different styles of cross frames could be available: Open cross frame Protection cross frame (available in plastic material or Aluminium) Machined cross frame (available in plastic material or Aluminium)	

Profile cross frame




Rods cross frame (available in plastic material, aluminum or steel)



Cross Frame. Please specify the style and material

Your Cross frame **Style**: Your Cross frame Material:

Application Type. Please specify the set up configuration of the chain.

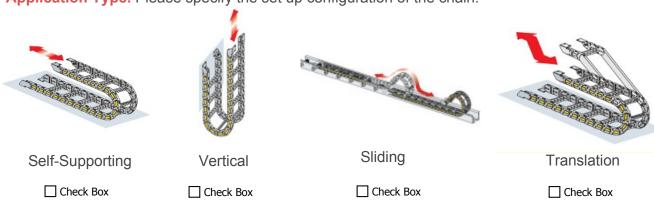

Click here to access our online index of Cable Carrier Chains